



VISUALPRESENTER HV-5000XG

ELMO

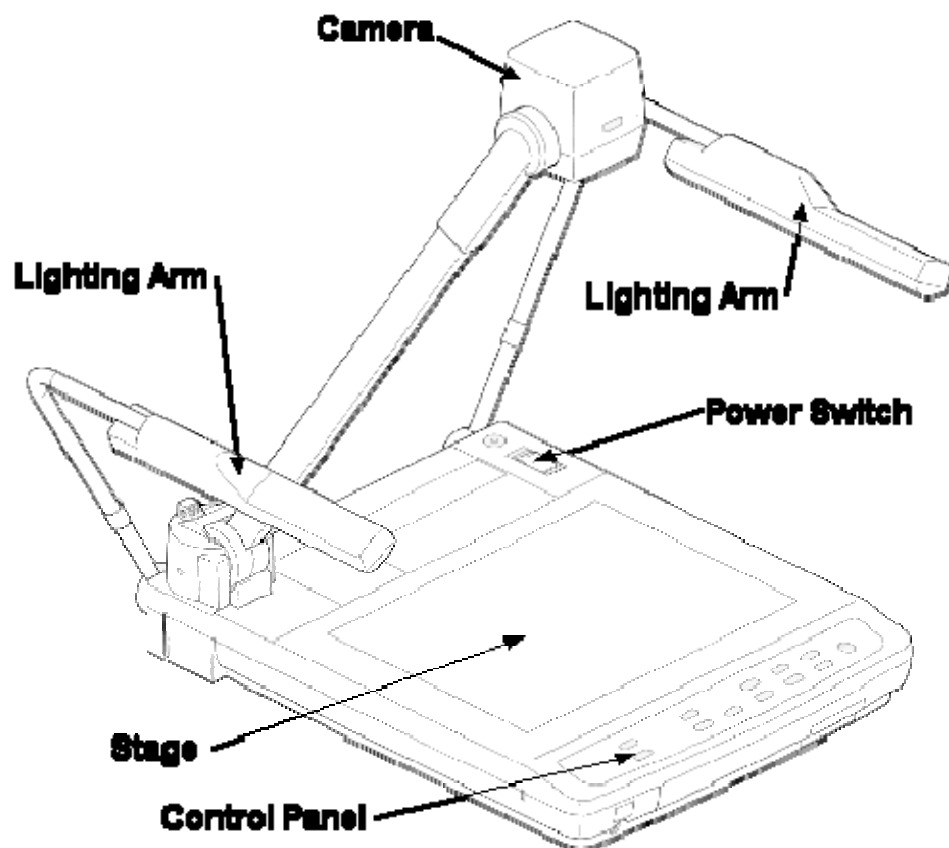

Control Panel Basic Controls

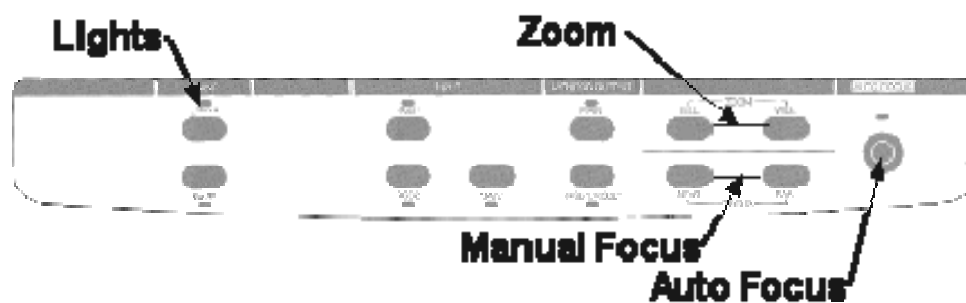

Steps for presenting printed material:

- Turn ON the ceiling mounted projector and select the "Comp2/BNC" source.
- Turn ON the visual presenter power switch.
 - If the power switch is turned ON immediately after being turned OFF, the Presenter may not operate. For restarting, turn ON the power switch several seconds after turning OFF.
- Place the object on the stage. Adjust the image size according to the object size using the zoom buttons [TELE] and [WIDE] on the control panel, while watching the image on the screen.
- Press the auto focus button [AF] on the control panel for focusing.

Steps for showing transparent material, such as overhead transparency:

- Turn ON the ceiling mounted projector and select the "Comp2/BNC" source.
- Turn ON the visual presenter power switch.
- Press the base button [BASE] on the control panel. The indication of the base button [BASE] will blink, and the built-in baselight will light up