

webster  
baldwin  
day  
rohrman


architects  
engineers

bangor, maine

1494

N.M.V.T.I.  
SHOP

PRESQUE ISLE  
MAINE

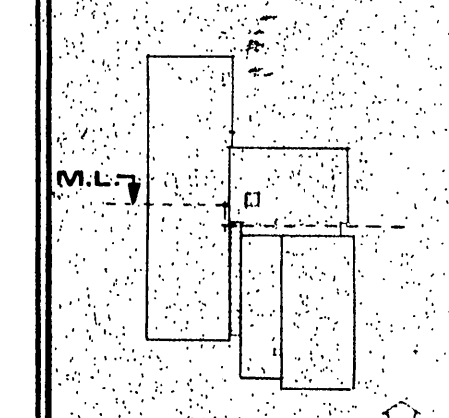



KEY PLAN

NO. REVISION DATE

DESIGNER	HWD/SBE
ENGINEER	AB
DRAWN BY	SBE
CHECKED BY	HWD
DATE	JUNE 1, 1981

1/8"  
ROOF  
PLAN  
NORTH

A-5

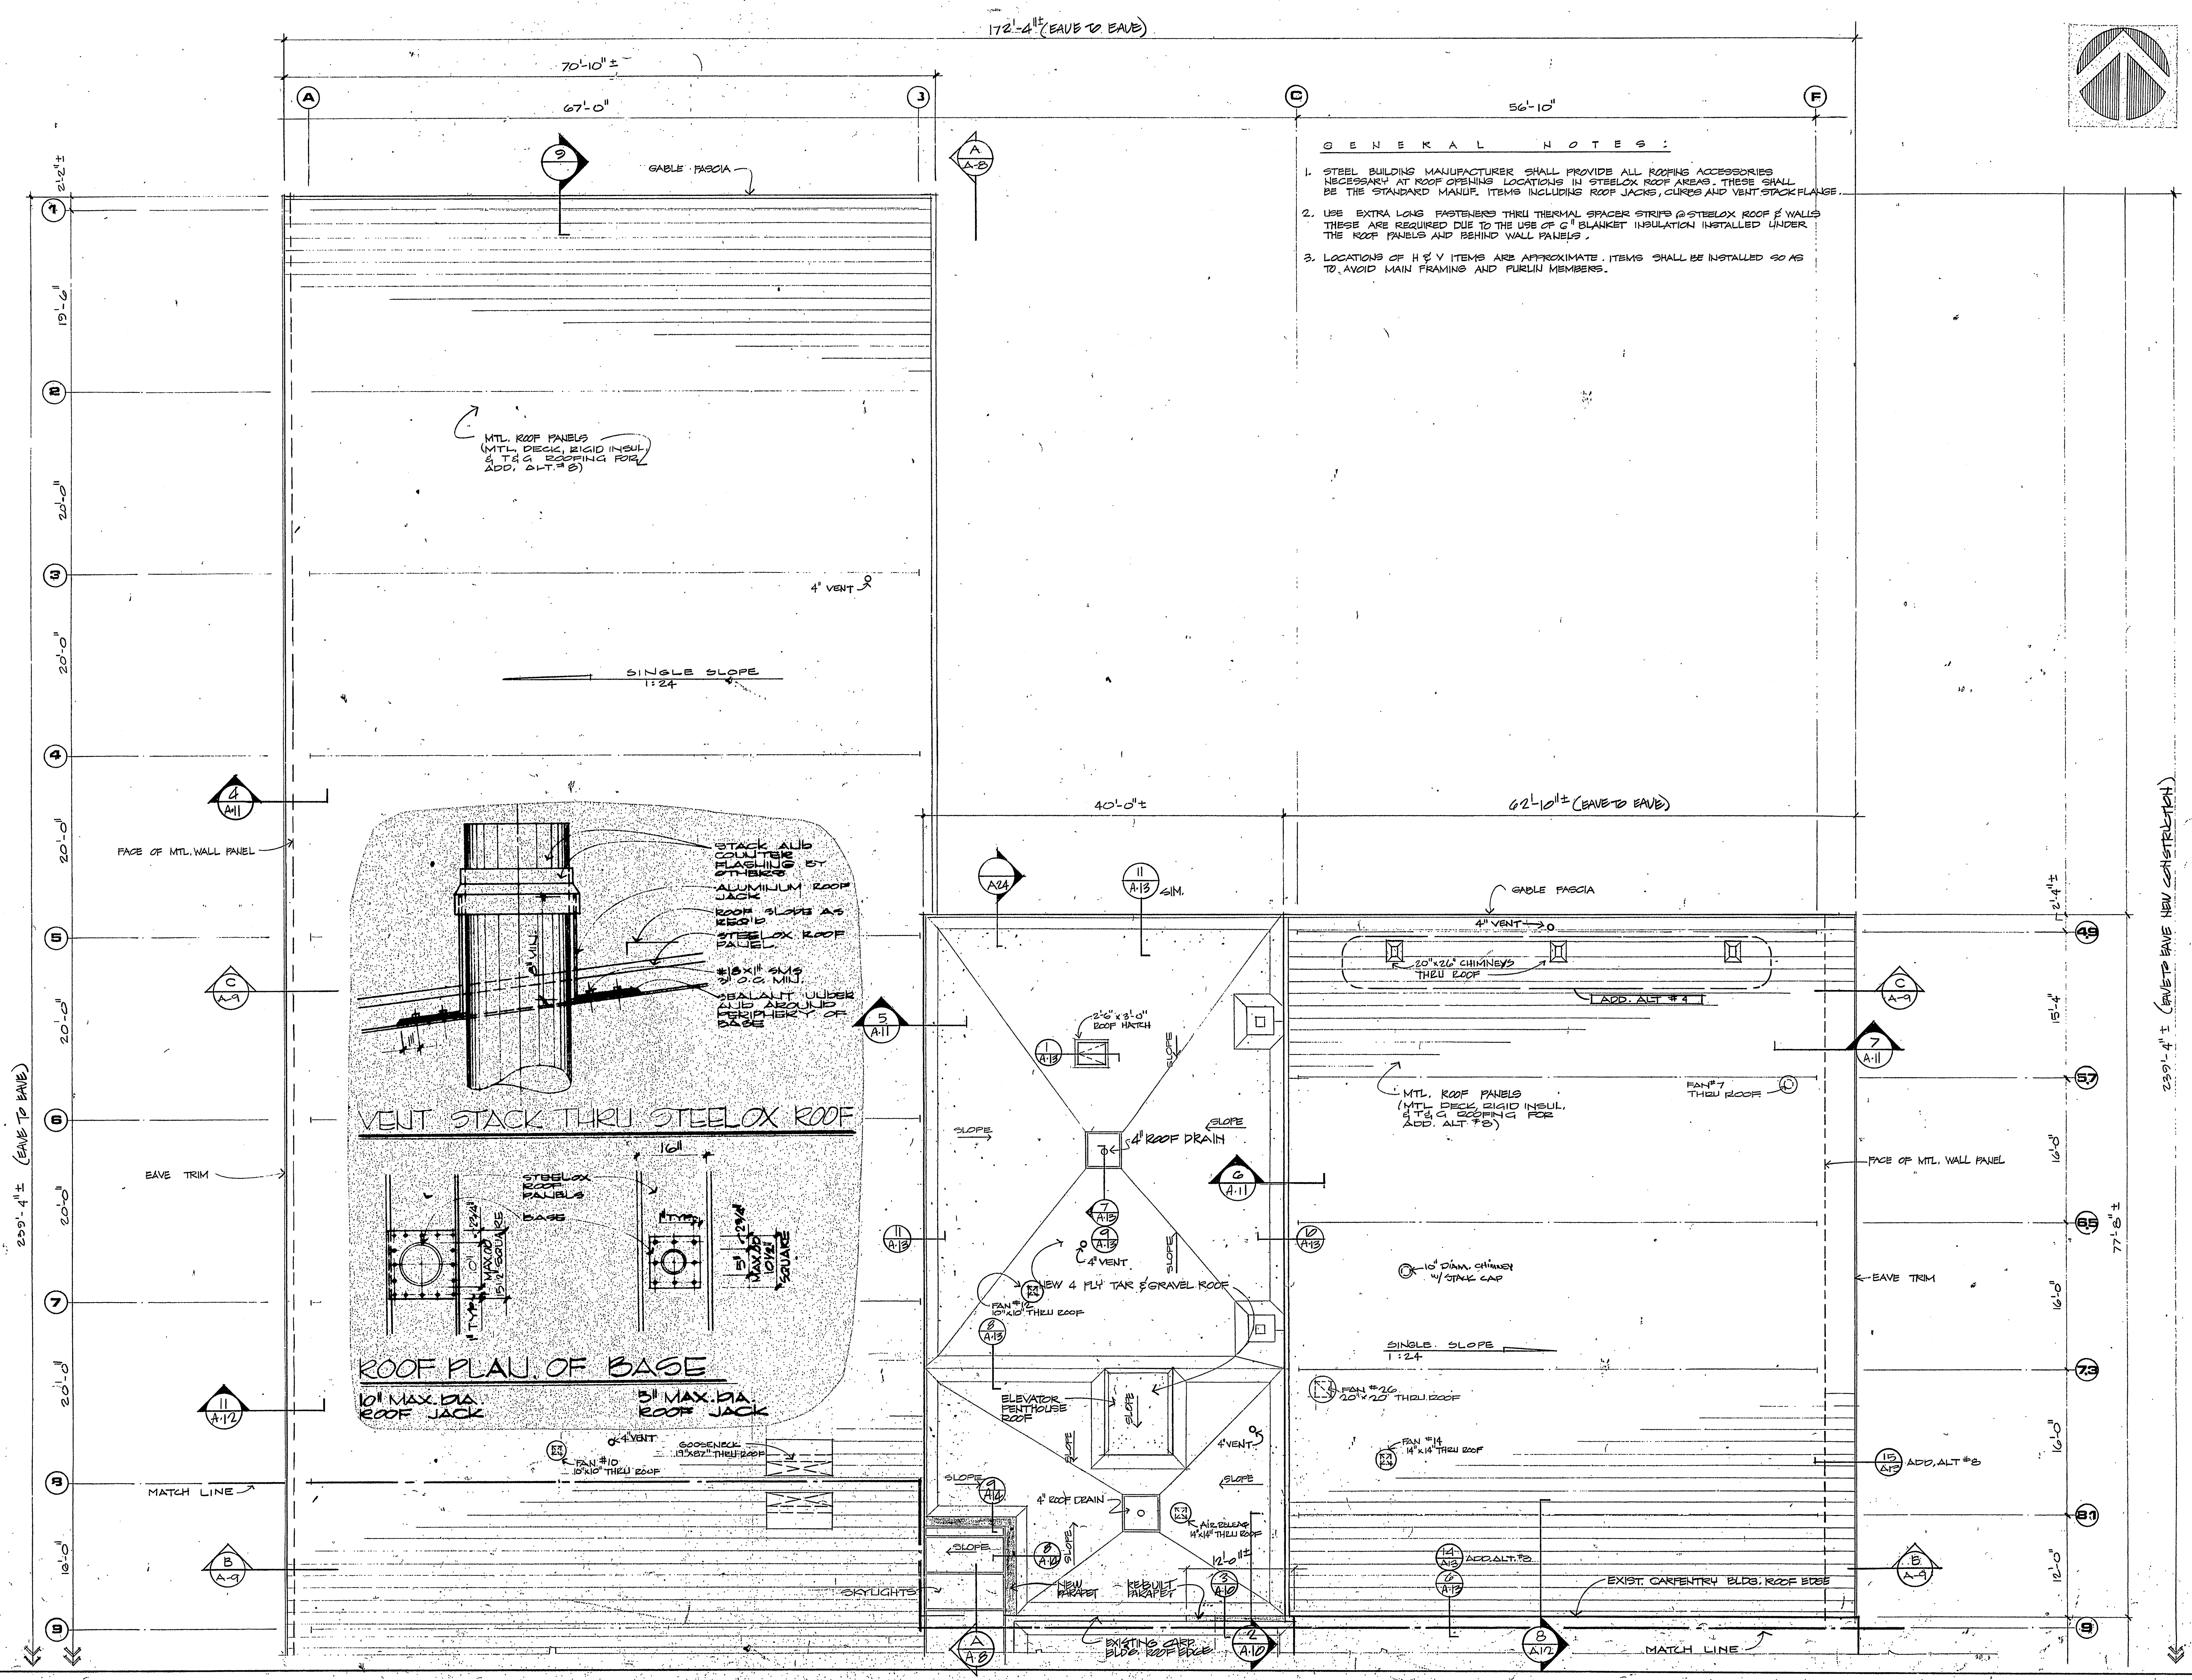

- GENERAL NOTES:
1. STEEL BUILDING MANUFACTURER SHALL PROVIDE ALL ROOFING ACCESSORIES NECESSARY AT ROOF OPENING LOCATIONS IN STEELOX ROOF AREAS. THESE SHALL BE THE STANDARD MANUF. ITEMS INCLUDING ROOF JACKS, CURBS AND VENT STACK FLASHING.
  2. USE EXTRA LONG FASTENERS THRU THERMAL SPACER STRIPS @ STEELOX ROOF & WALLS. THESE ARE REQUIRED DUE TO THE USE OF 6" BLANKET INSULATION INSTALLED UNDER THE ROOF PANELS AND BEHIND WALL PANELS.
  3. LOCATIONS OF H & V ITEMS ARE APPROXIMATE. ITEMS SHALL BE INSTALLED SO AS TO AVOID MAIN FRAMING AND PURLIN MEMBERS.