


LEGEND


- FACE BRICK + INSULATION + REGULAR OR SOUND ABSORBENT CONCRETE BLOCK
- CONCRETE BLOCK (SEE FINISH SCHEDULE FOR BLOCK TYPE)
- CONCRETE WALL
- N.I.C. NOT IN CONTRACT
- EPS EXPANDED POLYSTYRENE RIGID INSULATION
- M.O. MASONRY OPENING
- M.P. MOVEABLE PARTITION
- D.P. DRINKING FOUNTAIN
- W.S. WASH SINK
- E.W.S. EMERGENCY WASH SHOWER
- CB CHALKBOARD
- TB TACKBOARD
- WB WELDER'S BOOTH
- PB PEGBOARD
- UV UNIT VENTILATOR
- M.T. METAL THRESHOLD
- REGULAR BLOCK + INSULATION + REG. OR SOUND ABSORBENT CONCRETE BLOCK
- R.F.B. REFRACTORY BRICK CHIMNEY
- F.O.F. FACE OF FOUNDATION
- F.O.M. FACE OF MASONRY
- C.M.U. CONCRETE MASONRY UNIT
- FE#1 UL 4A GO 5/8" - 10# 3 ON WALL BRACKETS
- FE#2 UL 1A 10 5/8" - 2 1/2# 3 ON WALL BRACKETS
- GRO GLASS REINFORCED CONCRETE
- FD FLOOR DRAIN
- E.W.S. EMERGENCY WASH SHOWER

GENERAL NOTES


- CONCRETE PADS AT DOOR OPENINGS SHALL CONTAIN TWO LAYERS OF 6X6 W2.8XW2.9 WELDED WIRE FABRIC - ONE LAYER IN UPPER THIRD AND ONE LAYER IN LOWER THIRD.
- FIRE EXTINGUISHERS SHALL BE 1 1/2 A.A. 20 BC - 10# EXCEPT THOSE WHICH SHALL BE 1 1/2 A.A. 2 1/2 GAL.
- CARRY INTERIOR PARTITIONS OF ROOMS TO UNDERSIDE OF ROOF INSULATION OR TO UNDERSIDE OF PRECAST FLANK.
- POUR 4" HIGH CONCRETE BASE FOR LOCKERS. RECESS BASE 3" BACK FROM LOCKER FRONT TO CREATE A TOE SPACE.
- THE FIRST BLOCK CORE TO EACH SIDE OF ALL MASONRY OPENINGS SHALL BE FILLED FULL HEIGHT W/ MORTAR.

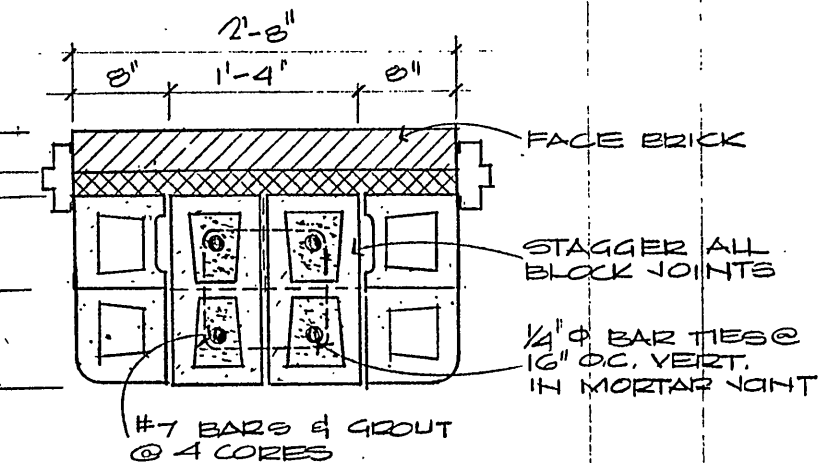

PIER DETAIL 1
SCALE: 3/4" = 1'-0"

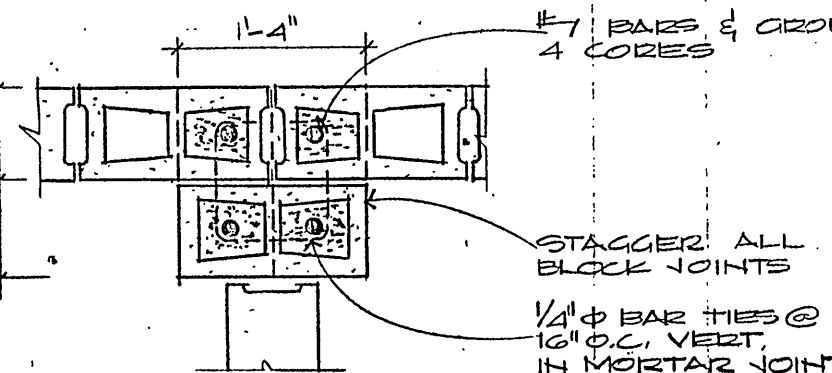

PIER DETAIL 2
SCALE: 3/4" = 1'-0"

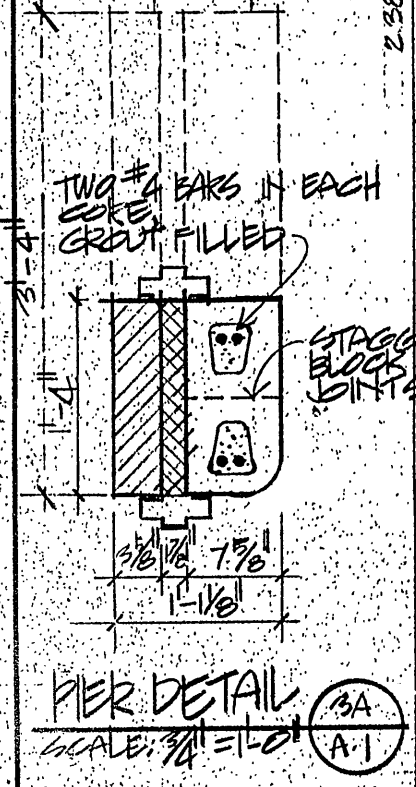

PIER DETAIL 3
SCALE: 3/4" = 1'-0"